
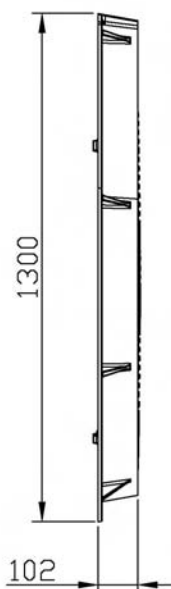
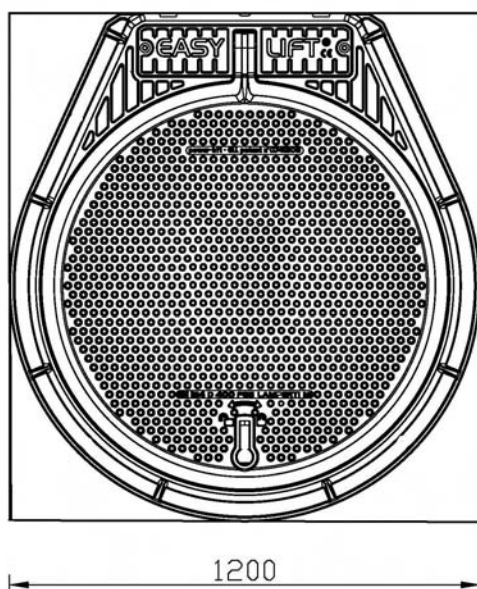


EASY LIFT 950D400-Q

CHIUSINO SERVOASSISTITO BREVETTATO A TENUTA STAGNA CLASSE D400

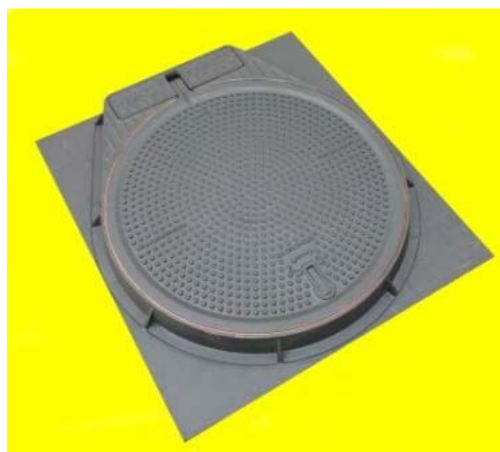

Descrizione tecnica:

Luce NettaDiam.950mm
Esterno1200x1300mm
Altezza102mm
Peso TotaleKg. 200

Classe UNI EN 124 Classe D400

Doppia Guarnizione

**Chiusura con dispositivo antiapertura
accidentale**

Una chiave di manovra lunga 60cm



FONDERIE GHISE SPECIALI LAMPERTI SRL

TEL 0039 02 99050241

LIMBIATE MI ITALY

EASY LIFT[®] 950 D 400

DATE : 02/19/2009

REV. : 00

FIRMA: 

EASY LIFT[®] 950 D400 SPECIFICATION

**WARNING: DON'T PLACE COVER CLOSED.
KEEP COVER OPENED UNTIL CONCRETE HARDENED.
SUGGESTIONS: DO NOT DISASSEMBLE COVER FROM FRAME.**

**IF NECESSARY, PLEASE MARK COVERS AND FRAME RESPECTIVELY.
TO DISASSAMBLE COVER FROM FRAME UNSCREW THE 2 BOLTS OF SPRINGS
LID AND PULL SPRINGS LID OUT.
ROTATE COVER UNTIL HINGE CONNECTION TOUCHES FRAME.
REMOVE COVER FROM FRAME.
TO ASSEMBLE COVER ON FRAME MAKE THE REVERSE OPERATION.**


CARRY ON LIKE THAT:

1. PUT EASY LIFT[®] MANHOLE COVER ON Diam.950/1000 mm FLOOR HOLE.
2. OPEN COVER AND CENTRE FRAME ON HOLE
3. PERFORM LEVELLING WITH CONCRETE
4. SEAL THE EXTERNAL SIDE FRAME WITH GROUND BY TAR OR EQUIVALENT
5. CAST CONCRET AROUND THE FRAME AND PUSH IT WITH CARE OVER THE FRAME FLANGE
6. CLOSE COVER ONLY WHEN CONCRETE HARDENED


**WATERTIGHT KEEPING:
EVERY TIME COVER LIFTED CLEAN GASKETS**

**KEEP GREASED THE
SPRINGS**

**KEEP GREASED THE
LOCK PIN**

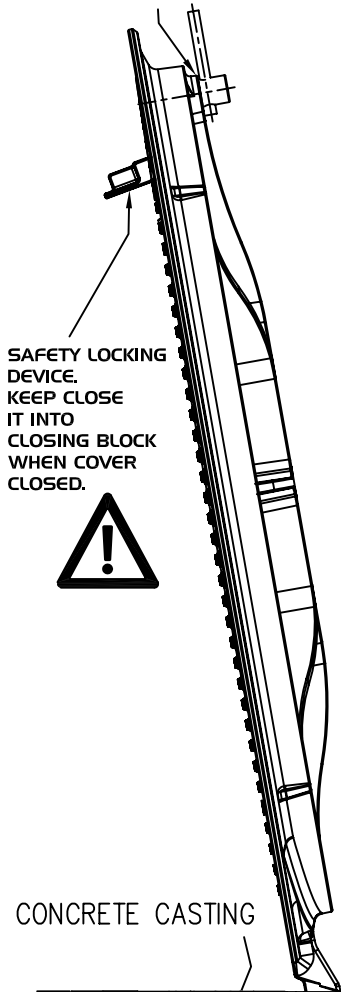

CONCRETE CASTING

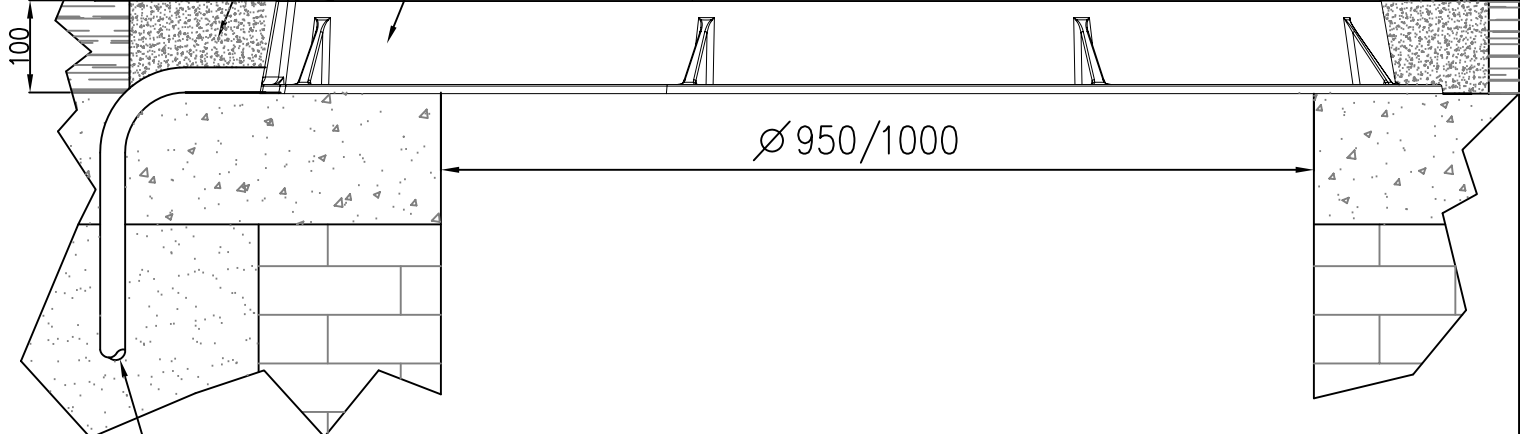

DIA.26mm DREINAGE PIPE.CONNECT PIPE TO DREINAGE CANAL OR IN SAND